



BS2 Bimetal (CU/AL) Kablo Pabuçları




Özellikler

✓ Önceden yuvarlanmış sektör biçimli iletkenler için

Malzeme : E-Al
Yüzey : EN 13600 Standartlarında Bakır

Ebatlar



Ürün Kodu		D ± 0,2	D1 ± 0,2 - 0,13	D2 ± 0,2	L ± 2	B ± 0,5	
BS2 01008	70	8	5,6	16	79	20	
BS2 01608	70	8	6,0	16	82	24	
BS2 01610	70	10	6,0	16	82	24	
BS2 01612	70	12	6,0	16	82	24	
BS2 02508	70	8	7,0	16	82	24	
BS2 02510	70	10	7,0	16	82	24	...BS0162535
BS2 02512	70	12	7,0	16	82	24	
BS2 03508	70	8	8,0	16	82	24	
BS2 03510	70	10	8,0	16	82	24	
BS2 03512	70	12	8,0	16	82	24	
BS2 05008	48	8	9,8	20	90	25	
BS2 05010	48	10	9,8	20	90	25	
BS2 05012	48	12	9,8	20	90	25	
BS2 07008	48	8	11,6	20	90	25	
BS2 07010	48	10	11,6	20	90	25	...BS0507095
BS2 07012	48	12	11,6	20	90	25	
BS2 09508	48	8	13,8	20	90	25	
BS2 09510	48	10	13,8	20	90	25	
BS2 09512	48	12	13,8	20	90	25	
BS2 12008	20	8	15,5	25	113	28	
BS2 12010	20	10	15,5	25	113	28	
BS2 12012	20	12	15,5	25	113	28	...BS120150
BS2 15008	20	8	17,0	25	113	28	
BS2 15010	20	10	17,0	25	113	28	
BS2 15012	20	12	17,0	25	113	28	
BS2 18508	15	8	18,5	32	130	35	
BS2 18510	15	10	18,5	32	130	35	
BS2 18512	15	12	18,5	32	130	35	...BS185240
BS2 24010	15	10	21,5	32	130	35	
BS2 24012	15	12	21,5	32	130	35	
BS2 24016	15	16	21,5	32	130	35	
BS2 30010	6	10	24,0	34	135	36	
BS2 30012	6	16	24,0	34	135	36	...BS300
BS2 30016	6	12	24,0	34	135	36	
BS2 40010	6	10	26,0	34	135	36	
BS2 40012	6	12	26,0	34	135	36	...BS400
BS2 40016	6	16	26,0	34	135	36	
BS2 50010	-	10	29,5	40	150	36	
BS2 50012	-	12	29,5	40	150	36	...BS500
BS2 50016	-	16	29,5	40	150	36	



Ambalaj Miktarı




Çene Tipi

Tüm ölçüler milimetre cinsindedir.



Bimetal (CU/AL) Kablo Pabuçları

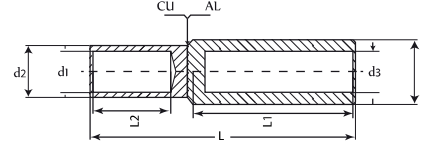

Özellikler

- ✓ Merkez bariyerleri
- ✓ Sızdırmazlık macunu ile doldurulmuştur
- ✓ Sürtünme yöntemi ile kaynak yapılmıştır

Ham madde : Bakır $\geq 99,9\%$, Al $\geq 99,5\%$
Uygulama : Orta Gerilim

Ebatlar

Ürün Kodu		L	L1	L2	d1	d2	d3	d4
AL16/CU10	100	66,5	47,5	13,0	4,4	6,0	5,6	12
AL16/CU16	100	66,5	47,5	13,0	5,5	8,5	5,6	12
AL25/CU10	100	66,5	47,5	13,0	4,4	6,0	6,8	12
AL25/CU16	100	72,5	47,5	20,0	5,5	8,5	6,8	12
AL25/CU25	100	72,5	47,5	20,0	7,0	10,0	6,8	12
AL35/CU16	100	72,5	47,5	20,0	5,5	8,5	8	14
AL35/CU25	80	72,5	47,5	20,0	7,0	10,0	8	14
AL35/CU35	80	72,5	47,5	20,0	8,2	8,5	8	14
AL50/CU25	80	75,0	47,5	20,0	7,0	10,0	9,8	16
AL50/CU35	50	75,0	47,5	20,0	8,2	12,2	9,8	16
AL50/CU50	50	75,0	47,5	20,0	10,0	10,0	9,8	16
AL70/CU35	50	75,0	47,5	20,0	8,2	12,2	11,2	18,5
AL70/CU50	50	81,0	47,5	26,0	10,0	14,5	11,2	18,5
AL70/CU70	30	83,0	47,5	27,0	11,5	12,2	11,2	18,5
AL95/CU50	45	81,0	47,5	26,0	10,0	14,5	13,2	22
AL95/CU70	45	83,0	47,5	27,0	11,5	16,5	13,2	22
AL95/CU95	35	83,0	47,5	27,0	13,5	19,0	13,2	22
AL120/CU70	40	99,0	64,0	27,0	11,5	16,5	14,7	23
AL120/CU95	40	107,0	64,0	35,0	13,5	19,0	14,7	23
AL120/CU120	40	107,0	64,0	35,0	15,5	21,0	14,7	23
AL150/CU95	40	107,0	64,0	35,0	13,5	19,0	16,3	25
AL150/CU120	40	107,0	64,0	35,0	15,5	21,0	16,3	25
AL150/CU150	40	107,0	64,0	40,0	17,0	23,5	16,3	25
AL185/CU120	25	107,0	64,0	35,0	15,5	21,0	18,3	28,5
AL185/CU150	25	112,0	64,0	40,0	17,0	23,5	18,3	28,5
AL185/CU185	25	112,0	64,0	40,0	19,0	25,5	18,3	28,5
AL240/CU150	25	112,0	64,0	40,0	17,0	23,5	21	32
AL240/CU185	25	115,0	64,0	42,5	19,0	25,5	21	32
AL240/CU240	25	116,0	64,0	43,0	21,5	29,0	21	32
AL300/CU185	48	152,5	101,0	42,5	19,0	25,5	23,3	34
AL300/CU240	48	153,5	101,0	43,0	21,5	29,0	23,3	34
AL300/CU300	48	159,5	101,0	49,0	24,5	32,0	23,3	34
AL400/CU306	48	159,5	101,0	49,0	24,5	32,0	23,3	34

✓ Firmamızın önceden haber vermeden ürün ölçülerinde değişiklik yapma hakkı saklıdır.