




Erkek / Dişi Geri Dönüşlü Terminaller İzoleli Kablo Uçları (Ekstra Bakır Yüksüklü)



Malzeme : Piring, Kalay Kaplı, Bakır Yüksüklü
İzolasyon : PVC
Çalışma Sıcaklığı : Maksimum 75 °C 600 Volt

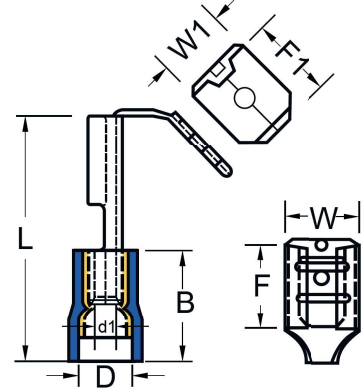


	Kablo Kesiti (mm ²)	Soket Genişliği	Ebatlar (mm)								Koli Miktarı (Ad)	Ambalaj Ağırlığı (~gr)
			W	F	L	B	D	d1				
	FDEG-1861	0,50 - 1,50	0,8 x 6,35	6,6	6,35	8,0	8,2	3,8	1,7	100	6.000	184
	FDEG-2862	1,50 - 2,50	0,8 x 6,35	6,6	6,35	8,0	8,2	4,7	2,3	100	6.000	191
	FDEG-5866	4,00 - 6,00	0,8 x 6,35	6,6	6,35	8,0	8,2	6,2	3,4	100	5.000	241

Polyamid Tam İzoleli Bayrak Tip Terminaller İzoleli Kablo Uçları



Malzeme : Piring, Kalay Kaplı, Bakır Yüksüklü
İzolasyon : Naylon
Çalışma Sıcaklığı : Maksimum 105 °C 600 Volt

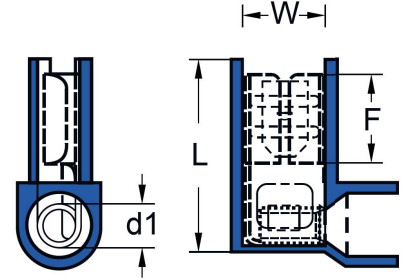

Ürün Kodu	Kablo Kesiti (mm ²)	Soket Genişliği	Ebatlar (mm)				Koli Miktarı (Ad)	Ambalaj Ağırlığı (~gr)
			W	F	L	d1		
PFDEB-1861	0,50 - 1,50	0,8 x 6,35	6,6	7,6	16,0	1,7	100	166
PFDEB-2862	1,50 - 2,50	0,8 x 6,35	6,6	7,6	16,0	2,3	100	170