




Safak®

Şafak Serisi Yuvarlak Tip izoleli Kablo Uçları DIN 46237 (PVC & Standart Giriş)




Malzeme : Bakır (E-Cu), Kalay Kaplı
İzolasyon : PVC
Çalışma Sıcaklığı : Maksimum 75 °C 600 Volt




	Kablo Kesiti (mm ²)		Ebatlar (mm)								Koli Miktarı (Ad)	Ambalaj Ağırlığı (~gr)	
			d2	d3	l	d1	d4	a	s				
	YK-301KPVC	0,50-1,50	M3	3,2	6,0	16,5	1,6	4,0	10,5	0,8	200	12.000	182
	YK-401KPVC		M4	4,3	8,0	17,5	1,6	4,0	10,5	0,8	200	12.000	206
	YK-501KPVC		M5	5,3	10,0	18,5	1,6	4,0	10,5	0,8	200	12.000	238
	YK-601KPVC		M6	6,5	10,0	22,5	1,6	4,0	10,5	0,8	200	12.000	255
	YK-801KPVC		M8	8,4	14,0	22,5	1,6	4,0	10,5	0,8	200	12.000	324
	YK-302MPVC	1,50-2,50	M3	3,2	6,0	17,0	2,3	4,5	11,0	0,8	200	12.000	202
	YK-402MPVC		M4	4,3	8,0	18,0	2,3	4,5	11,0	0,8	200	12.000	224
	YK-502MPVC		M5	5,3	10,0	20,0	2,3	4,5	11,0	0,8	200	10.000	269
	YK-602MPVC		M6	6,5	11,0	21,0	2,3	4,5	11,0	0,8	200	10.000	297
	YK-802MPVC		M8	8,4	14,0	22,5	2,3	4,5	11,0	0,8	200	10.000	346
	YK-1002MPVC		M10	10,5	18,0	25,5	2,3	4,5	11,0	0,8	100	5.000	253
	YK-1202MPVC		M12	13,0	18,0	25,5	2,3	4,5	11,0	0,8	100	6.000	200
	YK-406SPVC	4,00-6,00	M4	4,3	8,0	21,0	3,6	6,3	13,5	1,0	100	6.000	205
	YK-506SPVC		M5	5,3	10,0	22,5	3,6	6,3	13,5	1,0	100	6.000	223
	YK-606SPVC		M6	6,5	11,0	23,5	3,6	6,3	13,5	1,0	100	6.000	249
	YK-806SPVC		M8	8,4	14,0	26,5	3,6	6,3	13,5	1,0	100	5.000	290
	YK-1006SPVC		M10	10,5	18,0	28,5	3,6	6,3	13,5	1,0	100	5.000	351
	YK1206SPVC		M12	13,0	18,0	28,5	3,6	6,3	13,5	1,0	50	3.000	172

Şafak Serisi Çatal Tip izoleli Kablo Uçları DIN 46237 (PVC & Standart Giriş)

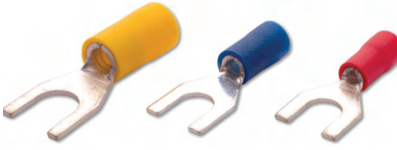

Malzeme : Bakır (E-Cu), Kalay Kaplı
İzolasyon : PVC
Çalışma Sıcaklığı : Maksimum 75 °C 600 Volt



	Kablo Kesiti (mm ²)		Ebatlar (mm)								Koli Miktarı (Ad)	Ambalaj Ağırlığı (~gr)	
			d2	d3	l	d1	d4	a	s				
	CK-301KPVC	0,50-1,50	M3	3,2	6,0	16,0	1,6	4,0	10,5	0,8	200	12.000	200
	CK-401KPVC		M4	4,3	6,8	17,0	1,6	4,0	10,5	0,8	200	12.000	200
	CK-501KPVC		M5	5,3	10,0	18,0	1,6	4,0	10,5	0,8	200	12.000	229
	CK-601KPVC		M6	6,5	11,0	20,0	1,6	4,0	10,5	0,8	200	12.000	242
	CK-302MPVC	1,50-2,50	M3	3,2	5,5	18,0	2,3	4,5	11,0	0,8	200	12.000	197
	CK-402MPVC		M4	4,3	6,8	17,0	2,3	4,5	11,0	0,8	200	12.000	202
	CK-502MPVC		M5	5,3	10,0	19,0	2,3	4,5	11,0	0,8	200	10.000	265
	CK-602MPVC		M6	6,5	11,0	21,0	2,3	4,5	11,0	0,8	200	10.000	297
	CK-406SPVC	4,00-6,00	M4	4,3	8,0	21,0	3,6	6,3	13,5	1,0	100	6.000	200
	CK-506SPVC		M5	5,3	10,0	22,0	3,6	6,3	13,5	1,0	100	6.000	226
	CK-606SPVC		M6	6,5	11,0	23,0	3,6	6,3	13,5	1,0	100	6.000	235
	CK-806SPVC		M8	8,4	14,0	26,0	3,6	6,3	13,5	1,0	100	5.000	284
	CK-1006SPVC		M10	10,5	18,0	28,0	3,6	6,3	13,5	1,0	100	2.500	197